
SANYO Cadnica

Cell Type KR-5/3MH

Specifications



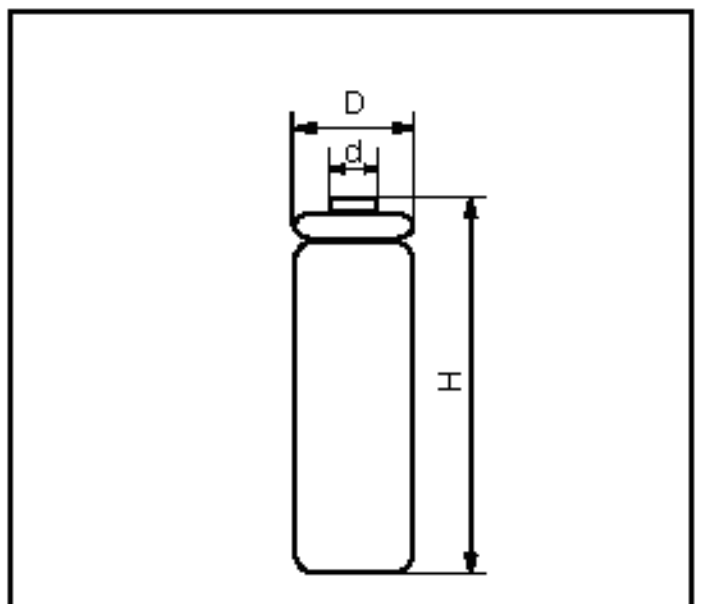


Dimensions of Bare Cell			
	H	$145.0^{\pm 0.4}$	mm
		$5.709^{\pm 0.016}$	inch
	D	$42.1^{\pm 0.3}$	mm
		$1.657^{\pm 0.012}$	inch
	d	15.0	mm
		0.591	inch


Nominal Capacity		20000mAh
Nominal Voltage		1.2V
Charging Current	Trickle	667mA
	Standard	2000mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0°C to +70°C [+32°F to 158°F]
	Discharge	-20°C to +70°C [-4°F to 158°F]
	Storage	-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at. 50% discharge)		2.6mΩ (at 1000Hz)
Weight		648g/ 22.86oz
Dimensions(D)×(H) (with tube)		$43.1\,^{0}_{-1}$ × $146.1\,^{0}_{-1.5}$ mm
		$1.70\,^{0}_{-0.04}$ × $5.75\,^{0}_{-0.06}$ inch

Typical Characteristics


Charge

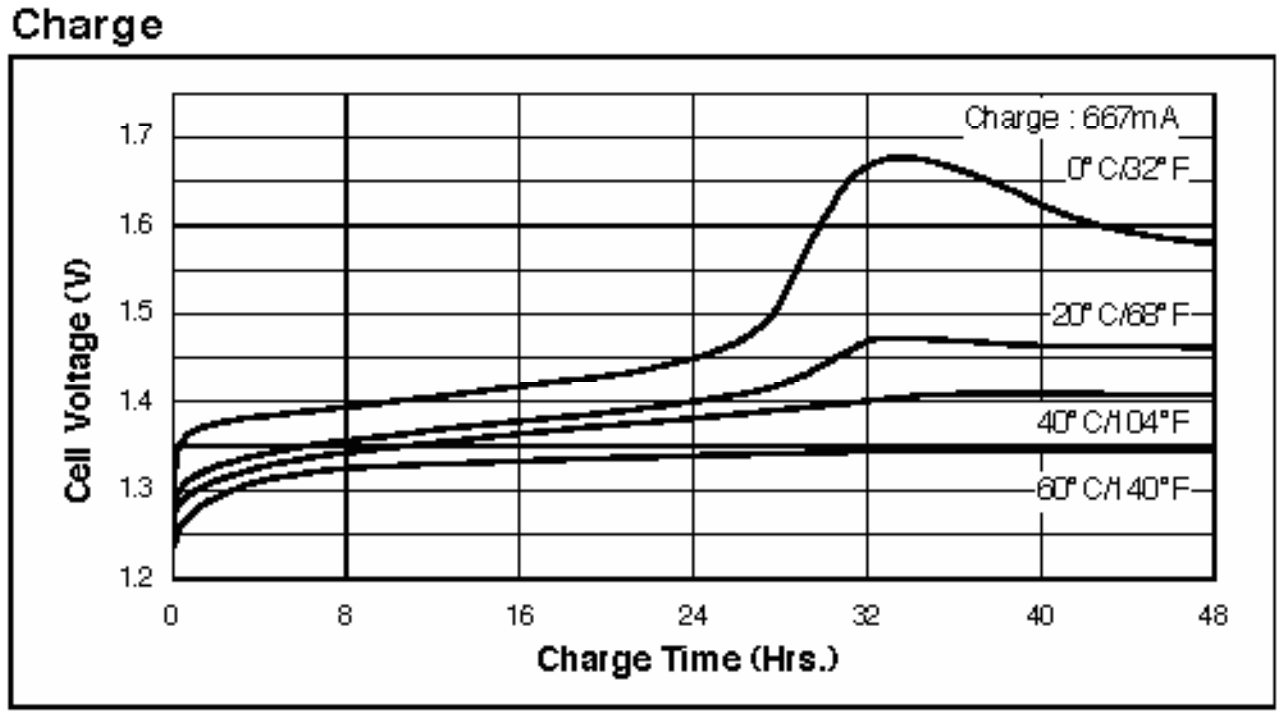


Discharge(at high rate)

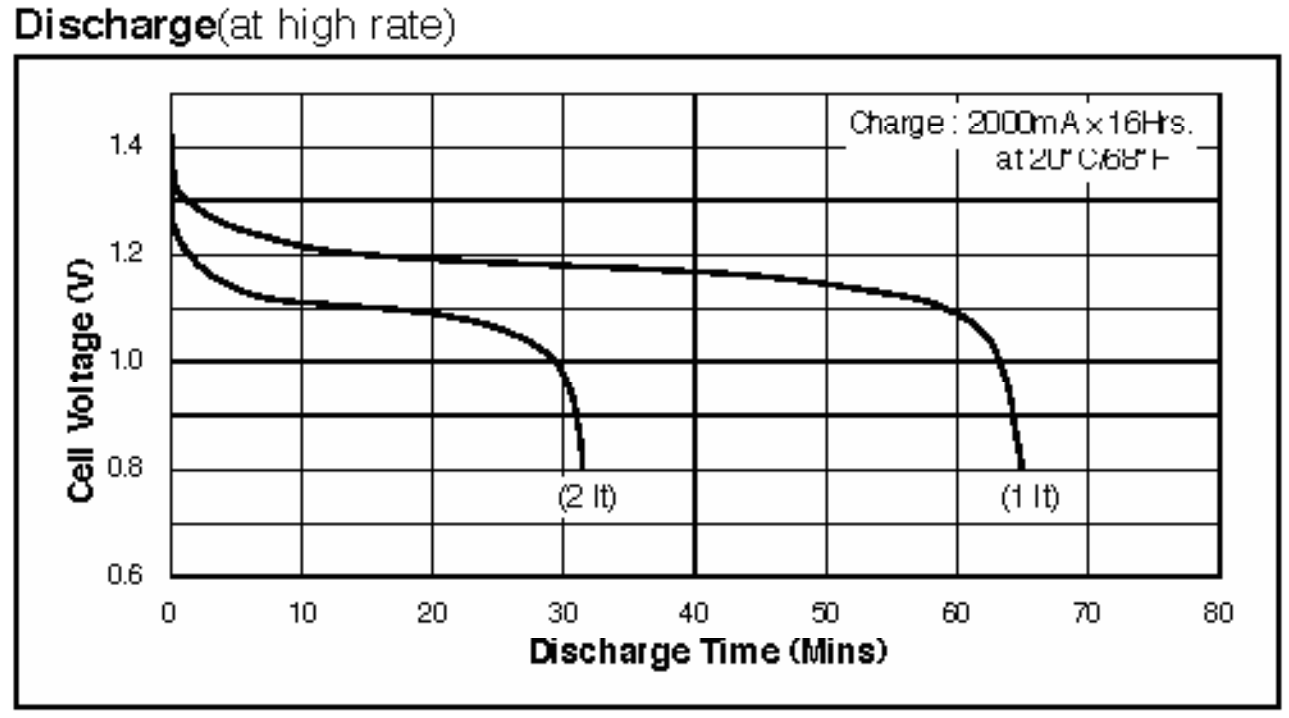


Charge

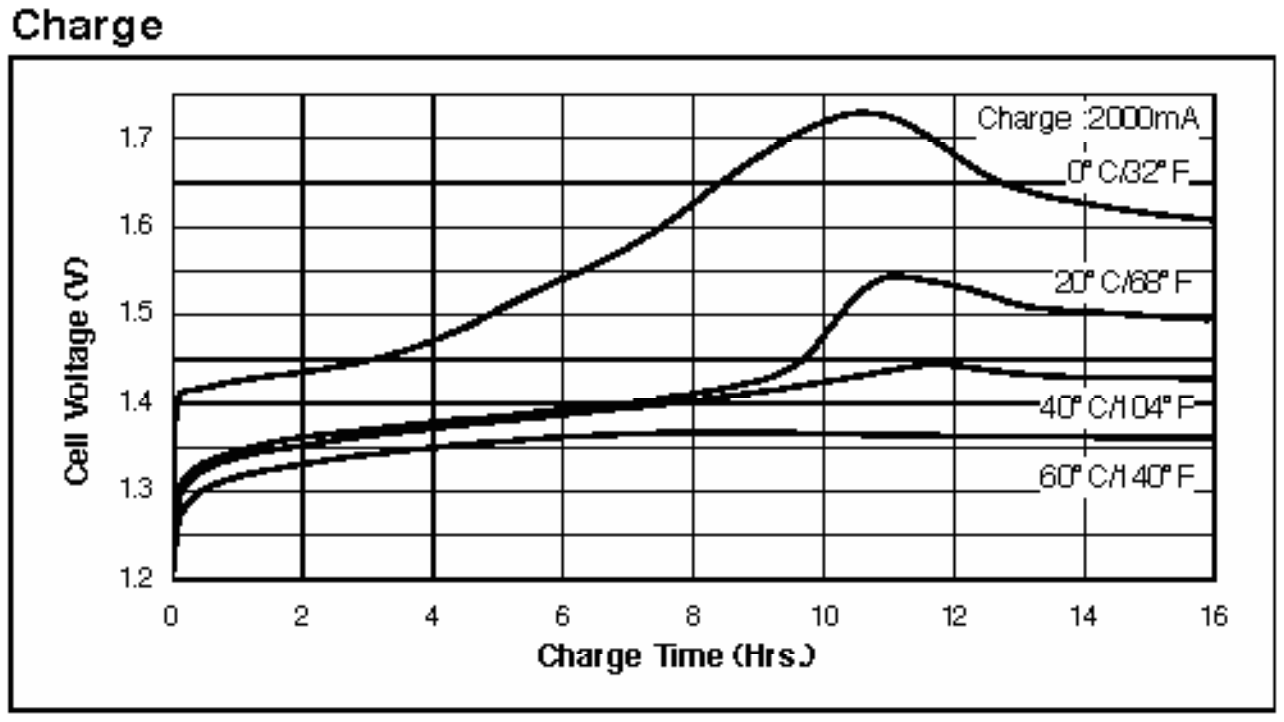


Discharge(at high rate)

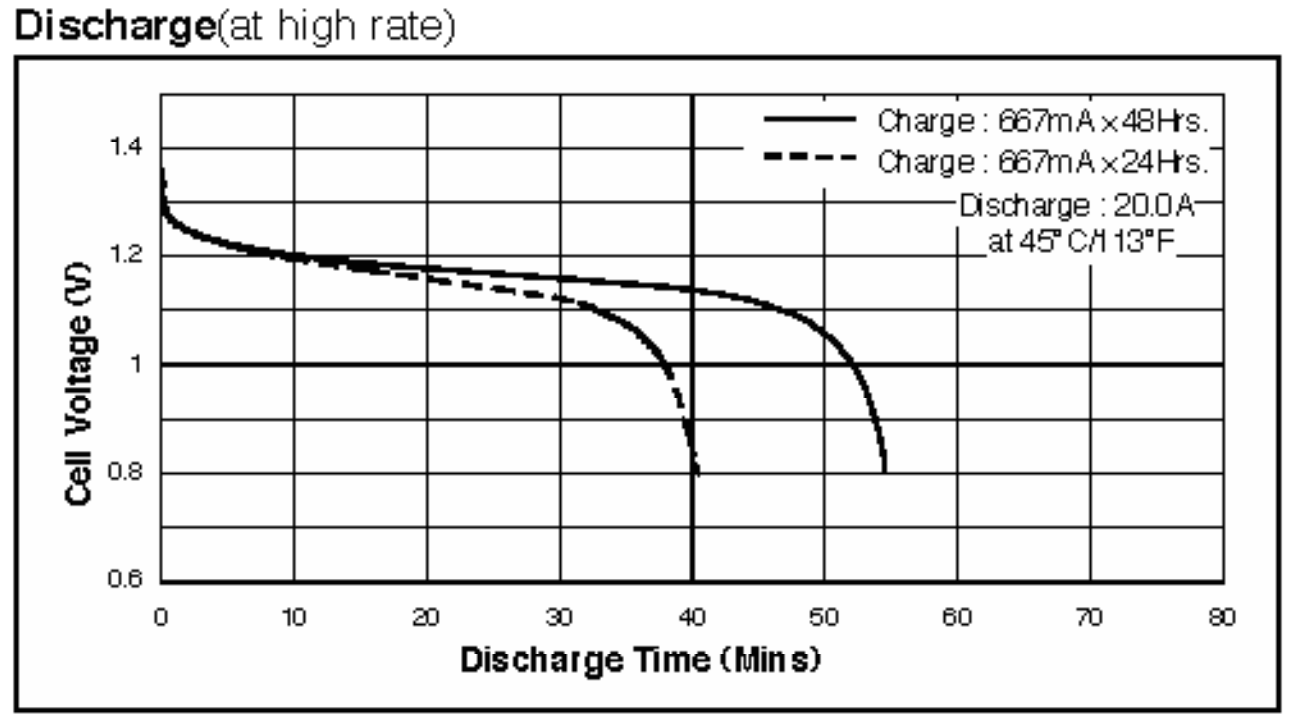

Discharge(at low rate)

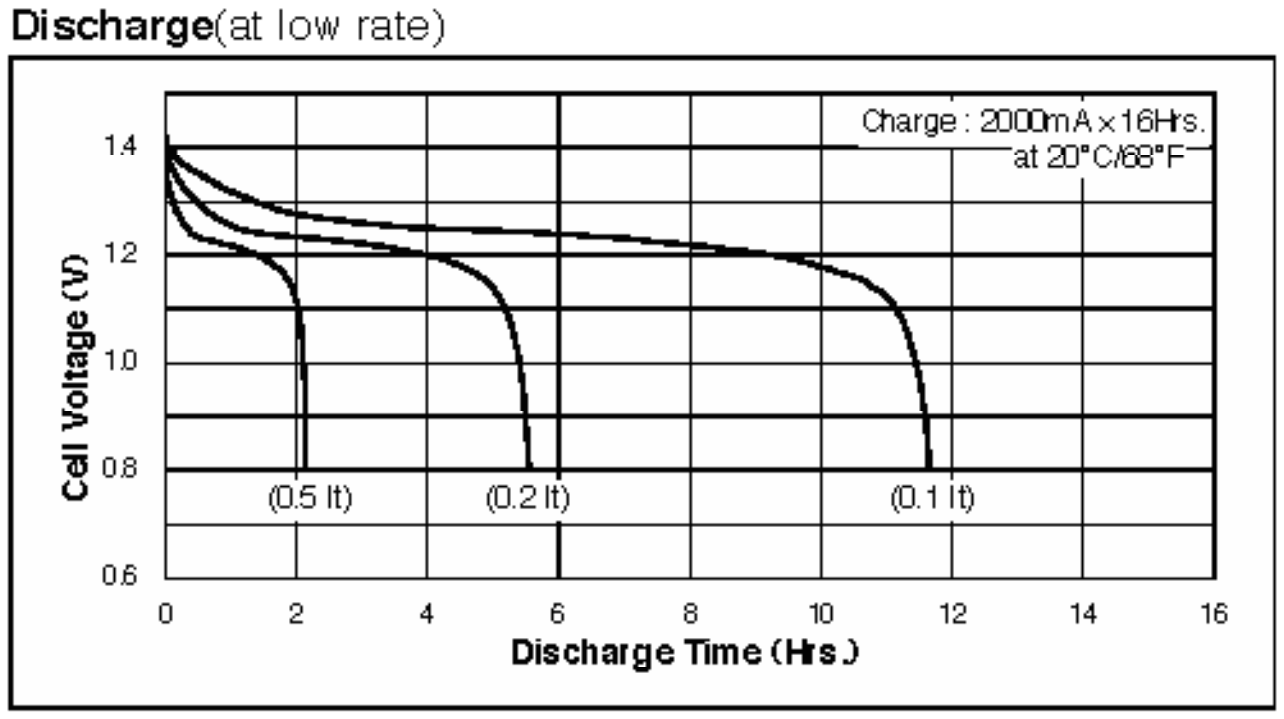

Temperature(Charge & Discharge)

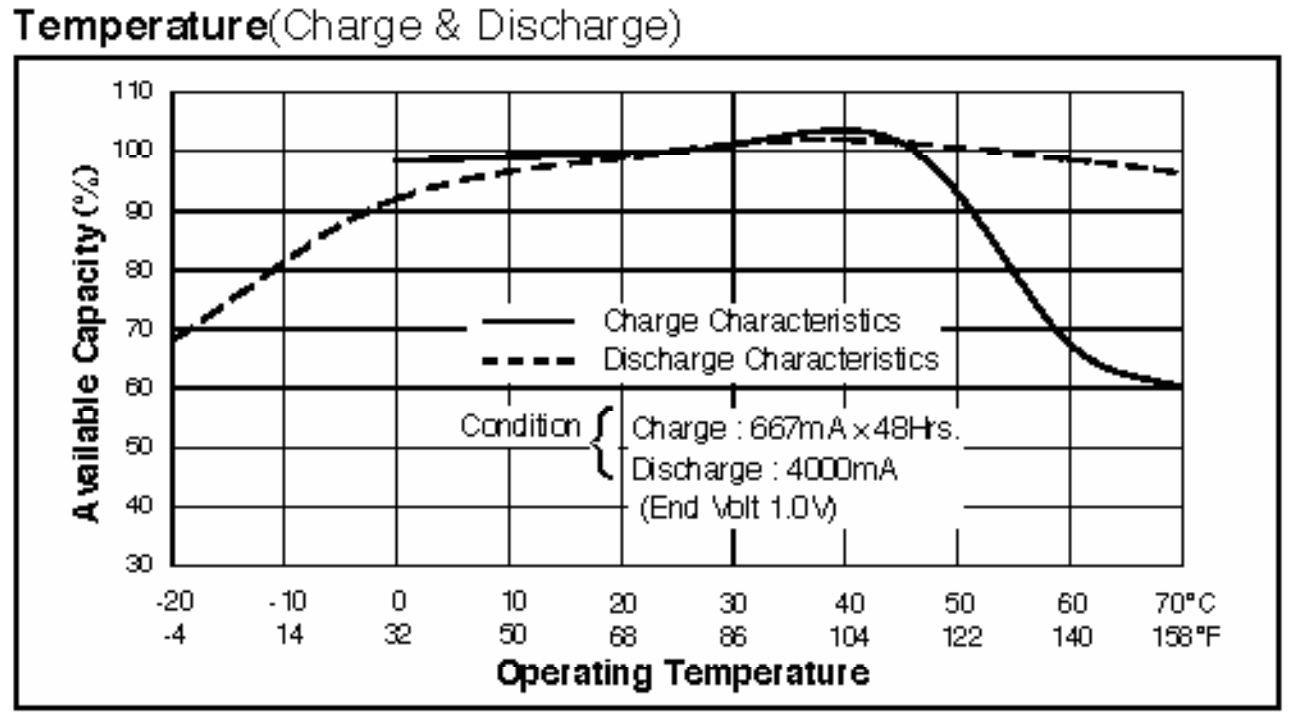

CD030825